

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 87116727.6

(51) Int. Cl.4: G07G 1/14

(22) Date of filing: 12.11.87

(30) Priority: 12.11.86 JP 268889/86

(43) Date of publication of application:
18.05.88 Bulletin 88/20

(54) Designated Contracting States:
AT BE CH DE ES FR GB GR IT LI LU NL SE


(71) Applicant: OMRON TATEISI ELECTRONICS CO.
10, Tsuchido-cho Hanazono Ukyo-ku
Kyoto 616(JP)

(72) Inventor: Tanaka, Toshifumi Omron Tateisi Electronics Co.
Patent Center 20 Igadera Shimo-Kalinji
Nagaokakyo-City Kyoto 617(JP)

(74) Representative: WILHELMS, KILIAN & PARTNER Patentanwälte
Eduard-Schmid-Strasse 2
D-8000 München 90(DE)

(54) Pos terminal group management device.

(57) In a transaction processing system including a plurality of POS terminal devices (cash registers) (12), a POS terminal group management device (cluster controller) (11) and a sales management device (store controller) (13), only necessary totalized data are transmitted from the POS terminal devices to the sales management device through the POS terminal group management device in accordance with totalization pattern information, thus increasing efficiency and speed of sales information processing.

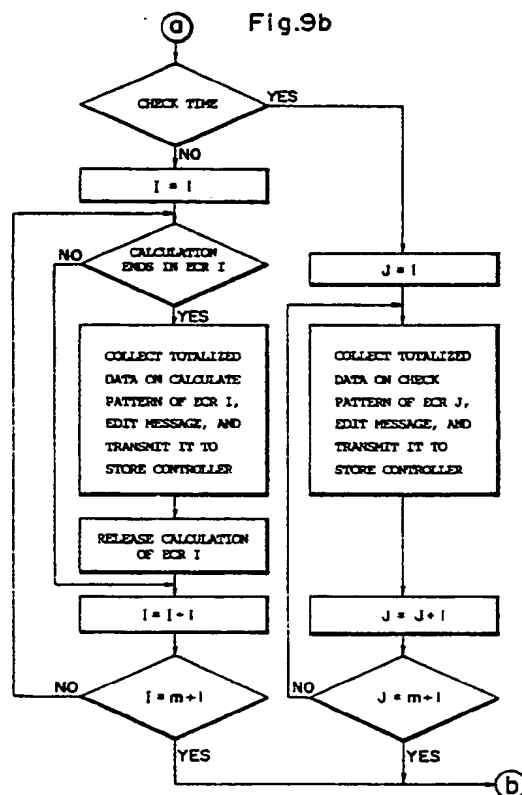

EP 0 267 614 A2

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a POS (point-of-sales) terminal group management device, and more specifically to a POS terminal group management device connected to both a plurality of POS terminal devices for registering data related to commodities (inclusive of services) and a sales management device for managing sales in stores.

Description of the Prior Art

As is well known, a number of POS terminal devices are equipped in a large store such as supermarket. These POS terminal devices are connected to a sales management device for managing sales via a POS terminal group management device. On the basis of setting messages from the sales management device, information indicative of an range of data to be collected in checking sales situation or in exactly calculating sales is determined. On the basis of the determined range, sales data of each POS terminal device are collected and transmitted to the sales management device. In the above description, when the current sales situation is checked, data stored in a mamory unit of the POS terminal are kept sorted, while after the sales are exactly calculated, data stored in a memory unit of the POS terminal are cleared.

In the prior-art management device, however, the range of data to be collected in sales check or sales calculation is determined uniformly, it has been impossible to change the range of data to be collected in each POS terminal device.

In a tenant building or a shopping center, detailed sales information is required for the directly managed stores. However, rough sales information (e.g. sales amount and the number of customers) is sufficient for other stores. Further, there exists a case where detailed sales information is collected once a month, and therefore rough information is sufficient on an ordinary occasion. As described above, in the prior art management device, since the range of data (sales information) to be collected is determined, there exist problems in that much time is spent to collect unnecessary data or it takes much time for checking processing or exact calculation processing. In addition, since labor time of the operators of the POS terminal devices and the sales management device increases and therefore they are usually late in coming back.

SUMMARY OF THE INVENTION

With these problems in mind, therefore, it is the primary object of the present invention to provide a POS terminal group management device which can collect necessary data from POS terminal devices and transmit collected data to a sale management device.

To achieve the above-mentioned object, a POS terminal group management device of the present invention is connected to both a plurality of POS terminal devices for registering data related to commodities and totalizing the registered data and a sales management device for managing sales, and comprises (a) storing means for previously storing totalization pattern information indicative of collection ranges of collected and totalized data for each POS terminal device; (b) commanding means for commanding the POS terminal device to transmit totalized data, and (c) control means for requesting transmission of necessary totalized data in accordance with totalization pattern information stored in said storing means in response to a command from said commanding means for each POS terminal device, and controlling transmission of the totalized data to said sales management device whenever the totalized data are transmitted from said POS terminal devices.

In the present invention, when transmission of totalized data is commanded, the POS terminal group management device requires necessary data transmission in accordance with totalization pattern information stored for each POS terminal device. When collected data are transmitted from the POS terminal device, the collected data are transmitted to the sales management device from the POS terminal group management device. Therefore, it is possible to eliminate unnecessary data transmission, to quickly obtain processed results of sales information, and to allow operators of the POS terminal devices and the sales management device to go home earlier.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a transaction processing system including a cluster controller of an embodiment of the present invention;

Fig. 2 is an illustration for assistance in explaining telegraphic message transmitted between the cluster controller and a store controller;

Figs. 3a to 3d are illustrations for assistance in explaining telegraphic messages transmitted from the store controller to the cluster controller;

Figs. 4a to 4c are illustrations for assistance in explaining telegraphic messages transmitted from the cluster controller to the store controller;

Figs. 5a to 5c are illustrations for assistance in explaining telegraphic messages transmitted between an ECR and the cluster controller;

Fig. 6 is a schematic block diagram showing an electrical construction of the cluster controller shown in Fig. 1;

Fig. 7 is an illustration showing a check time table stored in a RAM shown in Fig. 6;

Fig. 8 is an illustration showing a totalization pattern table stored in the RAM shown in Fig. 6 and

Figs. 9a and 9b are flowcharts for explaining the operation of an embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 shows a transaction processing system including an embodiment of the POS terminal group management device (referred to as a cluster controller, hereinafter) of the present invention. In Fig. 1, a plurality of electronic cash registers (referred to as ECRs) 12 corresponding to the POS terminal devices and a store controller 13 corresponding to the sales management device are connected to this cluster controller 11. The ECR 12 registers data related to commodities (e.g. a sum of money, the number of commodities, etc.) for commodity sales registration processing. The store controller 13 implements sales management.

Fig. 2 shows flows of telegraphic messages transmitted every day between the cluster controller and the store controller. Figs. 3a to 3d show messages transmitted from the store controller to the cluster controller, in which Fig. 3a shows a reset command message; Fig. 3b shows a check time setting message; Fig. 3c shows a totalization pattern setting message; and Fig. 3d shows a start command message. Figs. 4a to 4c show messages transmitted from the cluster controller to the store controller, in which Fig. 4a shows a checked data message; Fig. 4b shows an exact calculated data message; and Fig. 4c shows an end notice message. The totalization includes check and calculation. The check processing is a totalization processing with regard to the registered data in the memory of the ECR in which the registered data in the memory of the ECR are kept stored, whereas the calculation processing is the totalization processing in which the registered data in the memory of the ECR are cleared. With reference to Figs. 2 to 4, the meanings of messages transmitted between the cluster controller and the store controller

will be described hereinbelow.

At a business start time in stores, a reset command message 10, a check time setting message 20; a totalization pattern setting message 30 and a start command message 40 are transmitted from the store controller 13 to the cluster controller 11. The reset command message 10 commands the cluster controller 11 to be reset. The check time setting message 20 is a message for determining a check time and an end time at each ECR 12 is connected to the cluster controller 11. The totalization pattern setting message 30 is a message for determining a range of totalized data collection for each ECR 12. Here, if a code indicative of check pattern or exact calculation pattern is "1", only the terminal reports are collected. If "2", the terminal reports and reports for each person in charge (referred to as person-in-charge reports) are collected. If "3", the terminal reports, the person-in-charge reports, and reports for each section (group of commodities) (referred to as section reports) are collected. If "4", the terminal reports, the person-in-charge reports, the section reports, and reports for each PLU (price look-up) referred to as PLU reports) are collected. The start command message 40 is a message to start the transmission of checked data or calculated data.

In business time and at predetermined check times, the cluster controller 11 transmits the checked data message 50 transmitted from the ECR 12 to the store controller 13. Here, the checked data message 50 is composed of a code indicative of the kind of message (e.g. "1"), a number data indicative of an ECR from which the message is transmitted, and a code "X" indicative of the kind of totalized data. If "X" is 1, this indicates a terminal report, if 2, this indicates a person-in-charge report; if 3, this indicates a section report, if 4, this indicates a PLU report.

Further, the cluster controller 11 transmits a calculated data message 60 transmitted from any ECR 12 to the store controller 13 from the time T_i when the start command message 40 is received to the end time T_e when the business ends. Here, the calculation data message 60 is composed of a code (e.g. "2") indicative of the kind of message, a number indicative of an ECR from which the message is transmitted, a code "X" indicative of the kind of totalized data, and a totalized data. The codes indicative of the kind of totalized data are the same as in the checked data message. Further, the cluster controller 11 transmits an end notice message 70 to the store controller 13 at end time T_e .

Figs. 5a to 5c show messages transmitted between the ECRs and the cluster controller, in which Fig. 5a shows a message transmitted when a totalized data is requested; Fig. 5b shows a message

transmitted to check whether an exact calculation is completed or ended; and Fig. 5c shows a message transmitted to instruct to release an exact calculation.

At check times or at the determination of exact calculation end, the cluster controller 11 requests totaled data to ECR 12. At this moment, a code "Y" indicative of the kind of totaled data is included in the command 80 given from the cluster controller 11 to the ECR 12 and a response 90 returned from the ECR 12 to the cluster controller 11 in response to the command 80. If "Y" is "1", this indicates a terminal report; if "2", this indicates a person-in-charge report; if "3", this indicates a section report; if "4", this indicates a PLU report.

Further, the cluster controller 11 checks whether ECR 12 has already implemented exact calculation. At this moment, when a command 100 is given from the cluster controller 11 to the ECR 12, ECR 12 returns a response 110 to the cluster controller 11. This response 110 includes a code "Z" which discriminates whether exact calculation is completed or not. If "Z" is "0", this indicates that exact calculation is not yet completed; if "1", this indicates that exact calculation has been completed.

Further, to release exact calculation, the cluster controller 11 gives a command 120 to the ECR 12. In response to this command, the ECR 12 clears all registered data and totaled data in the memory for exact calculation release, outputting a response 130 to the cluster controller 11.

Fig. 6 is a schematic block diagram of an electrical construction of the cluster controller shown in Fig. 1. In Fig. 6, the cluster controller 11 is provided with a CPU 14, to which a ROM 15, a RAM 16, a store controller transmitter section 17, an ECR transmitter section 18, and a timer circuit 19. In the ROM 15, an operation program for the CPU 14 based upon a flowchart shown in Figs. 9a and 9b (described later) is stored. In the RAM 16, a check time table as shown in Fig. 7 and a totalization pattern table as shown in Fig. 8 (both described later) are stored. The store controller transmitter section 17 intermediates data transmission between the CPU 14 and the store controller 13, and the ECR transmitter section 18 intermediates data transmission between the CPU 14 and the ECR 12. The timer circuit 19 indicates the current time.

Fig. 7 shows a check time table stored in the RAM 16 shown in Fig. 6, and Fig. 8 shows a totalization pattern table stored in the RAM 16 shown in Fig. 6. In Fig. 7, the contents of the check time setting message 20 shown in Fig. 3b are stored in this check time table. In Fig. 8, the contents of the totalization pattern setting message 30 are shown in Fig. 3c are stored in this totaliza-

tion pattern table.

Figs. 9a and 9b are flowcharts for assistance in explaining the operation of an embodiment of the present invention. With reference to Figs. 1 to 9b, the operation of the embodiment will be described in detail hereinbelow.

In the cluster controller 11, the CPU 14 discriminates whether the store controller 13 transmits a message. If a message from the store controller 13 is received, the CPU 14 discriminates whether the received message is a reset command message 10. When this reset command is received, the cluster controller 11 stops transmitting a totaled data to the store controller 13.

On the other hand, if the message is not the reset command message 10, the CPU 14 discriminates whether the message is a check time setting message 20 or not. If a check time setting message 20, the CPU 14 stores a check time data and an end time data included in the message in the check time table shown in Fig. 7.

On the other hand, if not the check time setting message 20, the CPU discriminates whether the message is the totalization pattern setting message 30 or not. If a totalization pattern setting message 30, a totalization pattern of each ECR is stored in the totalization pattern table shown in Fig. 8.

On the other hand, if not the totalization pattern setting message 30, the CPU 14 discriminates whether the message is a start command message 40 or not. If a start command message 40, the CPU 14 discriminates whether the current time is an end time on the basis of an end time data stored in the check time table and the current time data given from the timer circuit 19. If the current time is an end time, an end notice message 70 is transmitted to the store controller 13, returning to the initial conditions.

On the other hand, if not the end time, the CPU discriminates whether the current time is a check time or not. If any one of check times T1 to Tn, a command 80 is applied to all the ECRs 12 connected to the cluster controller 11. For instance, when the check pattern of the ECR 12 includes a terminal report and a person-in-charge report, since Y is 1 and 2, a command "11" indicative of terminal report transmission and a command "12" indicative of person-in-charge report transmission are transmitted. Therefore, a response 90 including a terminal report and a response 90 including a person-in-charge report are transmitted from the ECR 12 to the cluster controller 11. When the cluster controller 11 receives a response 90 including a totaled data from the ECR 12, a checked data message 50 is edited and then transmitted to the store controller 13. The above operation is effected to all the ECR 12.

On the other hand, if not the check time, the

CPU checks for each ECR12 whether exact calculation has been completed or not; that is, the cluster controller 11 gives a command 100 to each ECR 2. And, when a response 110 including a code indicative of exact calculation completion is given from the ECR 12, a command 80 indicative of totalized data is given. When a response 90 is given from the ECR 12, an exact calculation data message 60 is edited and transmitted to the store controller 13. Therefore, a command 120 is given to the ECR 12 to release the exact calculation of the ECR, so that a response 130 is returned from the ECR 12. The above-mentioned operation is made for all the ECRs 12 in which exact calculation has been completed. After the checking operation and the exact calculation operation have been implemented for all the ECRs, control returns to a routine for discriminating whether the current time reaches an end time.

As described above, since only necessary data are collected in accordance with check pattern or exact calculation pattern previously determined for each ECR and then transmitted to the store controller, the processing efficiency can be improved.

As described above, in the POS terminal group management device of the present invention, since the transmission of necessary totalized data is requested in accordance with totalization pattern information stored for each POS terminal device whenever the transmission of totalized data is commanded and further the totalized data are transmitted to the sales management device when the totalized data are transmitted from the POS terminal device, it is possible to eliminate the transmission of useless data and therefore to quickly obtain sales information processing results, thus allowing operators of the POS terminal devices and the sales management device to go home earlier without working extrahours or overtime.

Claims

1. A point-of-sales terminal group management device (11) connected to both a plurality of point-of-sales terminal devices (12) for registering data related to commodities and totalizing the registered data and a sales management device (13) for managing sales, which comprises:

(a) storing means (16) for previously storing totalization pattern information indicative of collection ranges of collected and totalized data for each point-of-sales terminal device;

(b) commanding means (14) for commanding the point-of-sales terminal device to transmit totalized data;

(c) control means (14) for requesting transmission of necessary totalized data in accordance with totalization pattern information stored in said storing means in response to a command from said commanding means for each point-of-sales terminal device, and controlling transmission of the totalized data to said sales management device whenever the totalized data are transmitted from said point-of-sales terminal device.

2. The point-of-sales terminal group management device as set forth in claim 1, which further comprises timer means (19) for measuring current time, and wherein said commanding means commands each point-of-sales terminal device to transmit totalized data whenever said timer means measures a predetermined time.

3. The point-of-sales terminal group management device as set forth in claim 1, wherein said commanding means commands the point-of-sales terminal device which has already completed exact calculation processing to transmit totalized data whenever each point-of-sales terminal device has completed exact calculation processing.

Fig.1

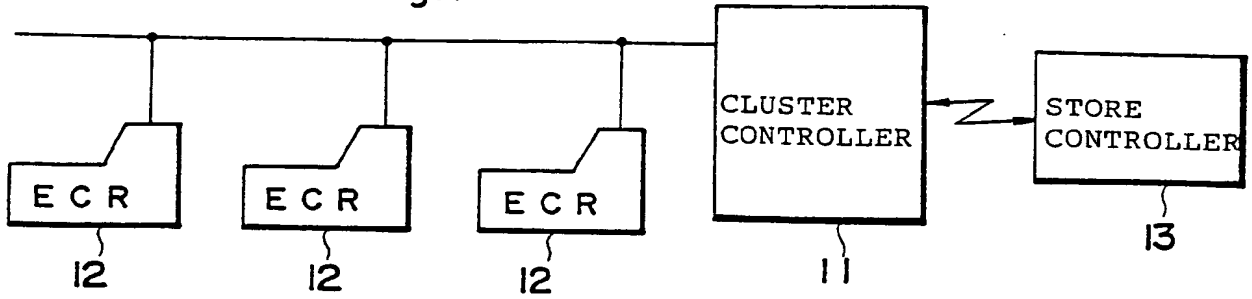


Fig.2

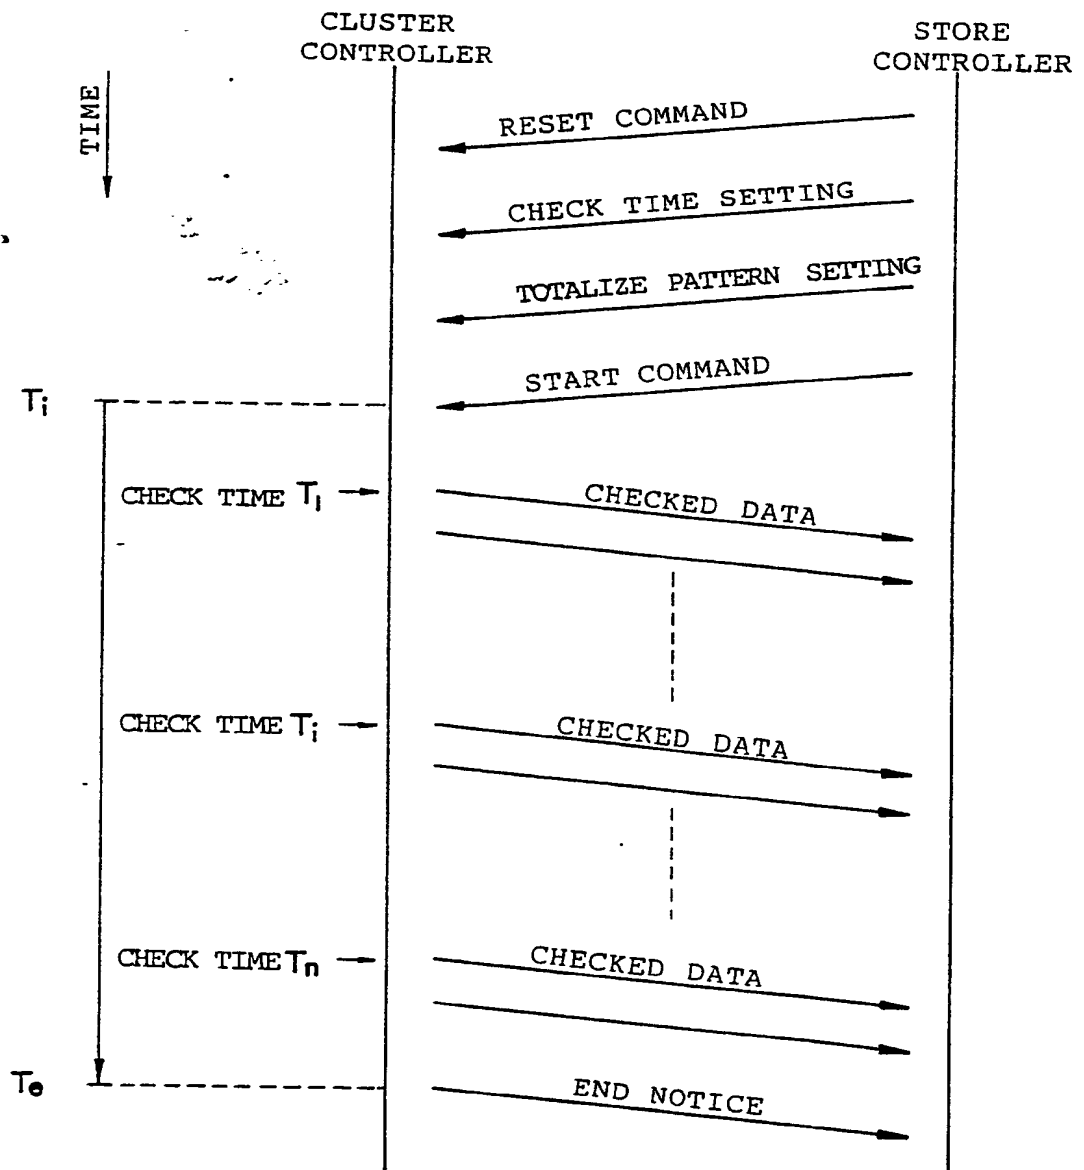


Fig.3a

RESET COMMAND MESSAGE




Fig.3b

CHECK TIME SETTING MESSAGE

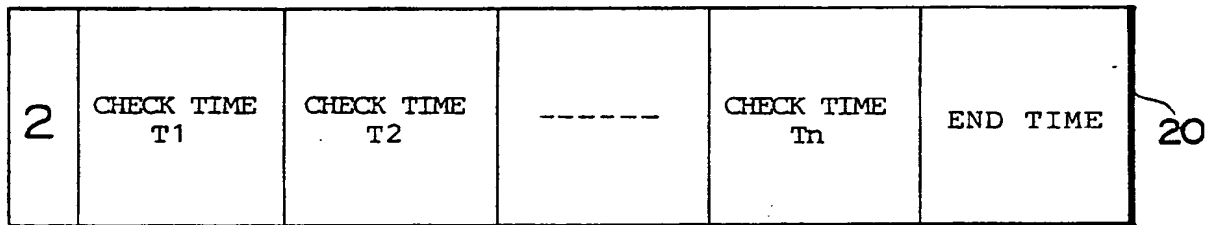


Fig.3c

TOTALIZE-PATTERN SETTING MESSAGE

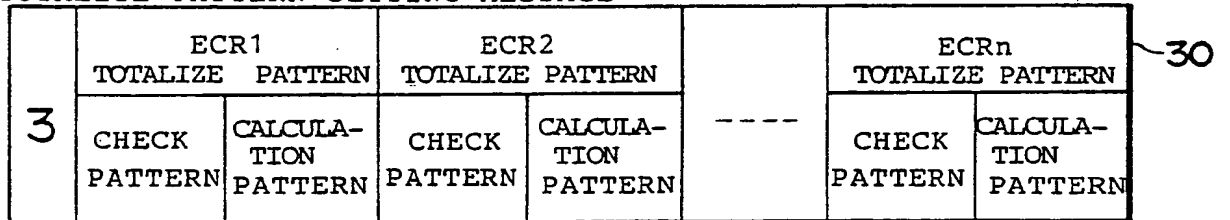


Fig.3d

START COMMAND MESSAGE




Fig. 4a

CHECKED DATA MESSAGE

50

1	ECR NO.	X	TOTALIZED DATA
---	---------	---	----------------

Fig. 4b

CALCULATED DATA MESSAGE

60

2	ECR NO.	X	TOTALIZED DATA
---	---------	---	----------------

Fig. 4c

END NOTICE MESSAGE

70

9

Fig.5a

AT TOTALIZED DATA REQUEST

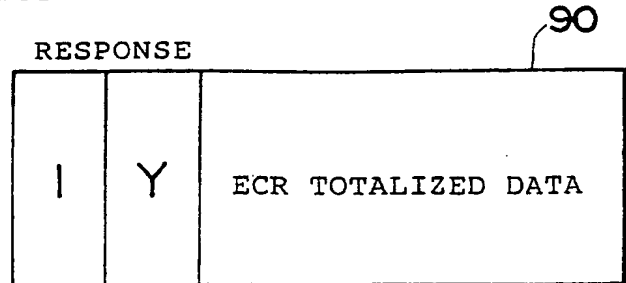
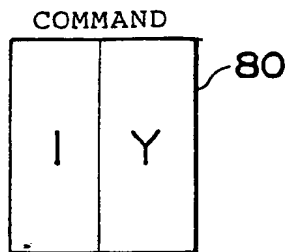


Fig.5b

AT CALCULATION-END CHECK

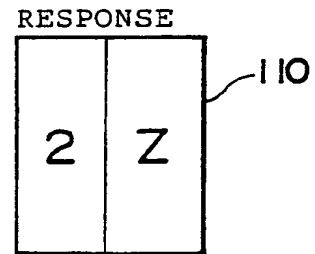
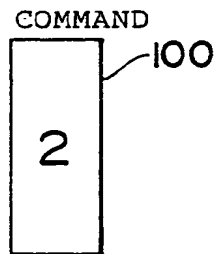


Fig.5c

AT CALCULATION RELEASE COMMAND

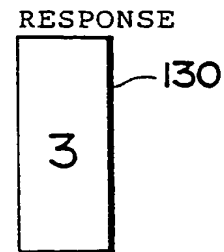
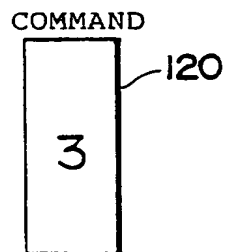


Fig.6

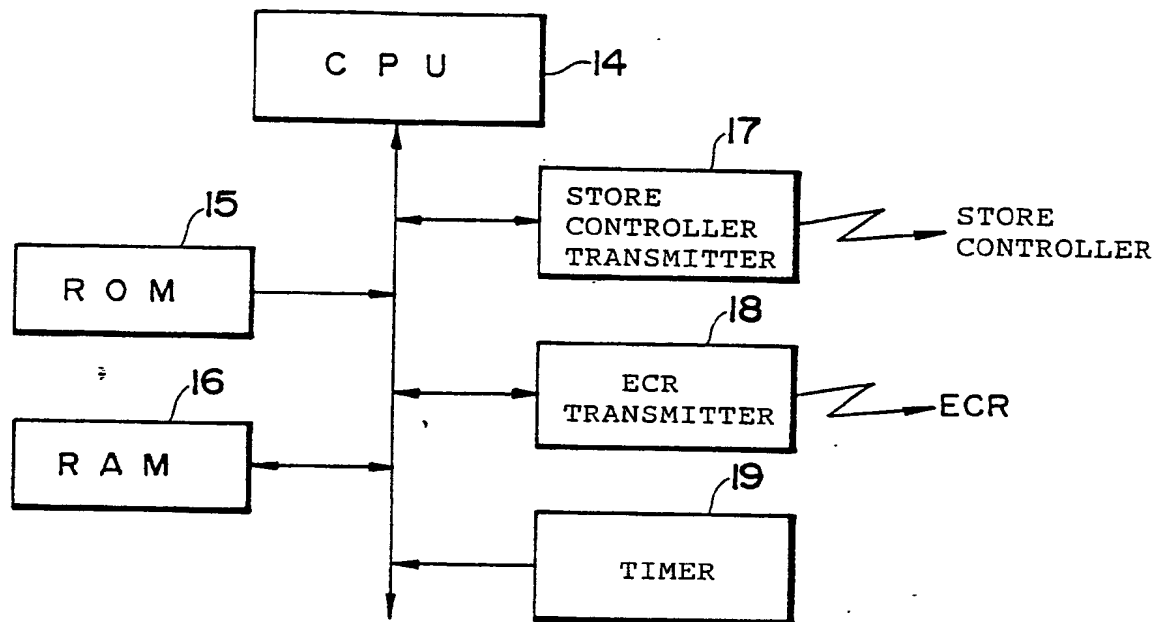


Fig.7

CHECK TIME TABLE	
CHECK TIME T1	
CHECK TIME T2	
CHECK TIME Tn	
END TIME	

Fig.8

TOTALIZE PATTERN TABLE	
ECR 1	CHECK PATTERN
	CALCULATION PATTERN
ECR 2	CHECK PATTERN
	CALCULATION PATTERN
ECR m	CHECK PATTERN
	CALCULATION PATTERN

Fig. 9a


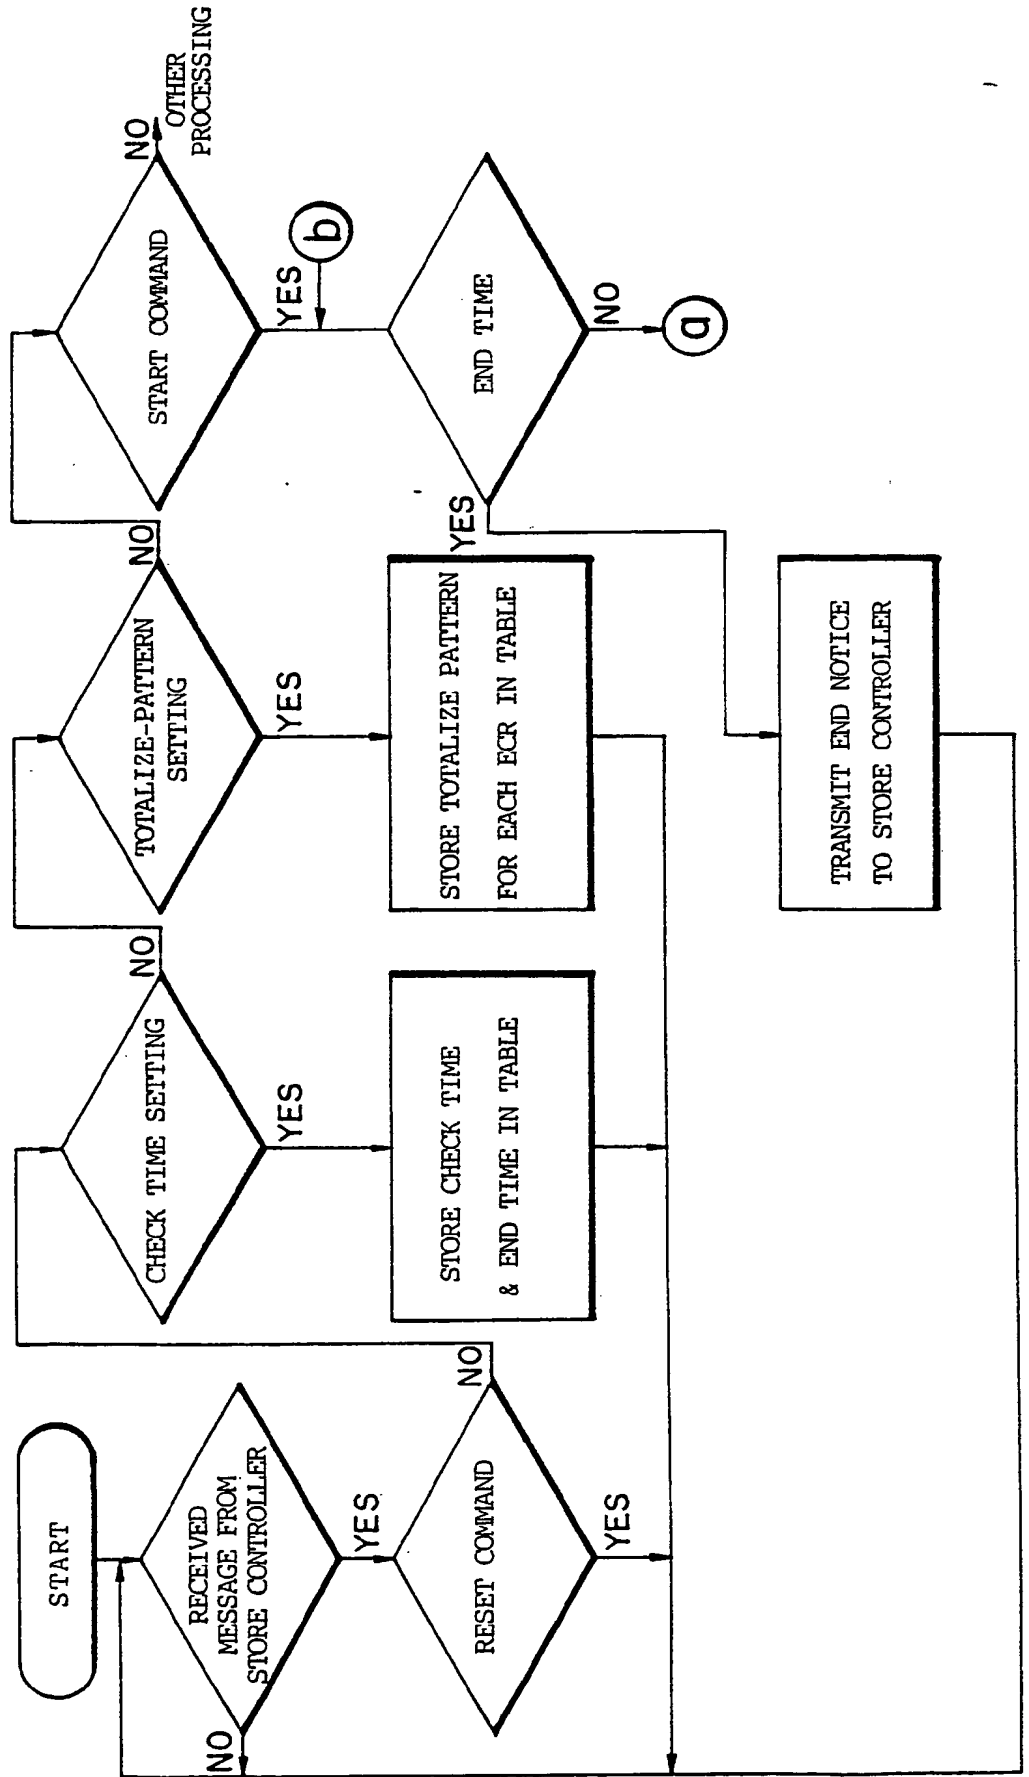


Fig.9b

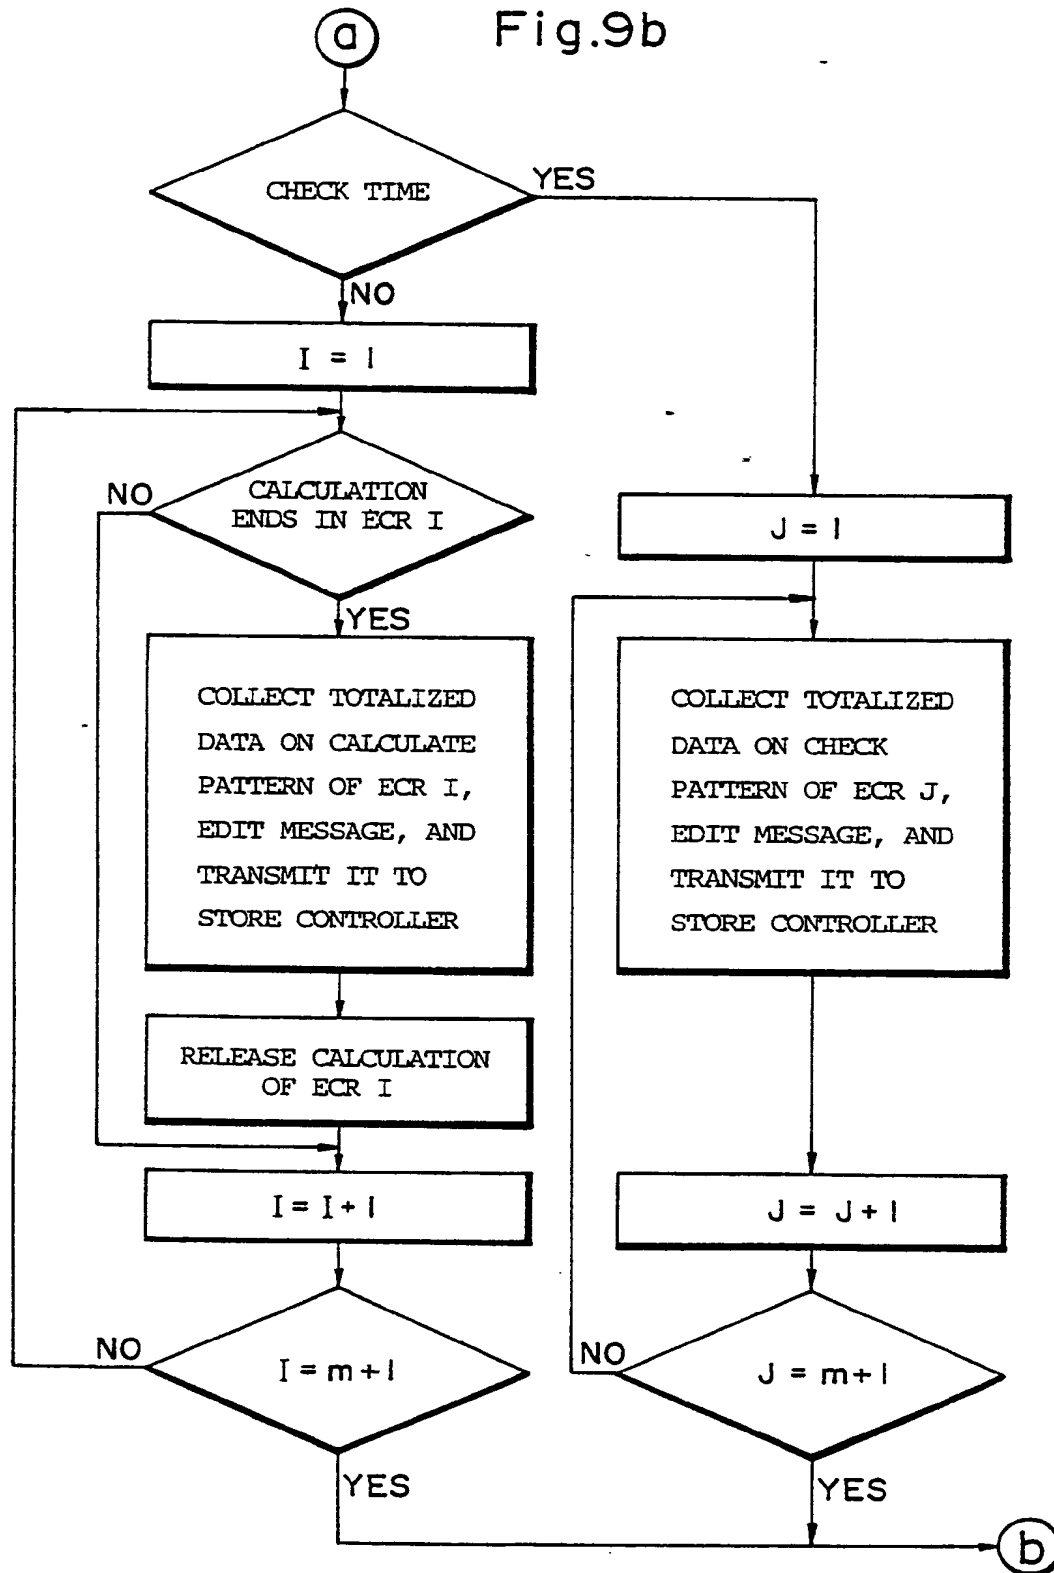

12 **EUROPEAN PATENT APPLICATION**

21 Application number: 87116727.6

51 Int. Cl.4: **G07G 1/14**

22 Date of filing: 12.11.87

30 Priority: 12.11.86 JP 268889/86

43 Date of publication of application:
18.05.88 Bulletin 88/20

64 Designated Contracting States:
AT BE CH DE ES FR GB GR IT LI LU NL SE

68 Date of deferred publication of the search report:
25.10.89 Bulletin 89/43


71 Applicant: **OMRON TATEISI ELECTRONICS CO.**
10, Tsuchido-cho Hanazono Ukyo-ku
Kyoto 616(JP)

72 Inventor: **Tanaka, Toshifumi Omron Tateisi Electronics Co.**
Patent Center 20 Igadera Shimo-Kainji
Nagaokakyo-City Kyoto 617(JP)

74 Representative: **WILHELMS, KILIAN & PARTNER Patentanwälte**
Eduard-Schmid-Strasse 2
D-8000 München 90(DE)

54 **Pos terminal group management device.**

57 In a transaction processing system including a plurality of POS terminal devices (cash registers) (12), a POS terminal group management device (cluster controller) (11) and a sales management device (store controller) (13), only necessary totalized data are transmitted from the POS terminal devices to the sales management device through the POS terminal group management device in accordance with totalization pattern information, thus increasing efficiency and speed of sales information processing.

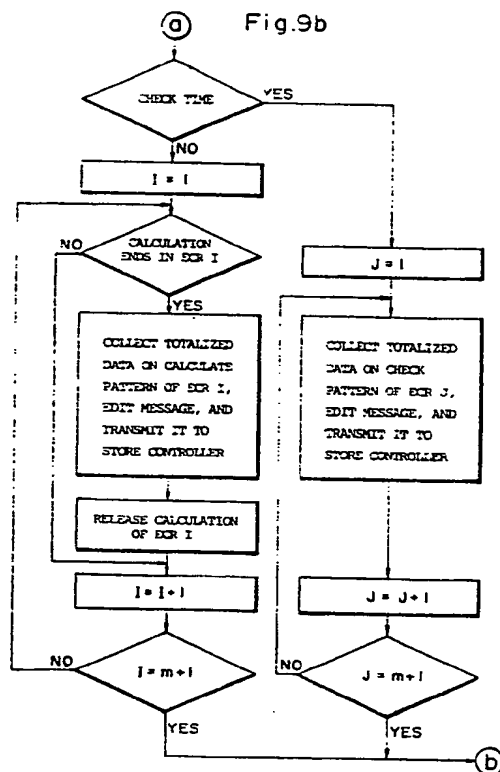

EP 0 267 614 A3



EP 87 11 6727

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
X	PATENT ABSTRACTS OF JAPAN, vol. 6, no. 53, 8th April 1982; & JP-A-56 166580 (SHARP K.K.) 21-12-1981 * Abstract *	1,2	G 07 G 1/14
A	GB-A-1 177 020 (RANDOING et al.) * Claims 1-10; page 1, lines 11-85; figures 1-10 *	1-3	
A	US-A-4 425 619 (MATSUDA et al.) * Abstract; column 1, lines 1-58; column 2, line 8 - column 3, line 12; figure 1; claims 1-4 *	1-2	
A	US-A-4 319 326 (UCHIDA) * Abstract; figures 1-5; column 1, line 25 - column 2, line 25; claims 1-6 *	1	
A	US-A-4 186 439 (SHIMURA et al.) * Whole document *	1,2	
A	US-A-3 596 256 (FELCHECK et al.) * Abstract; column 1, line 1 - column 3, line 52; column 4, line 32 - column 18, line 39; claims 1-11; figures 1-7 *	1	TECHNICAL FIELDS SEARCHED (Int. Cl. 4) G 07 G G 06 F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 01-08-1989	Examiner GUIVOL, O.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1502 03.82 (P0401)